


Dual Output Mini-MAXX Boxes  
1, 2 Channels

**MX542-2A** Powder Coated Aluminum Enclosure

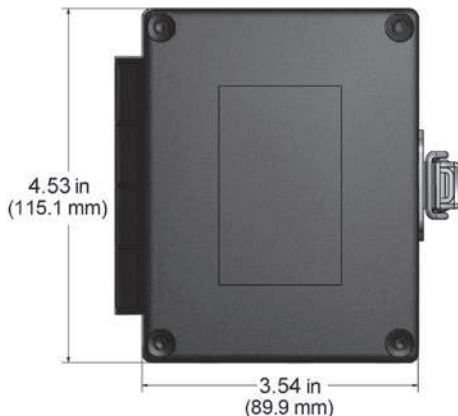

**Product Features**

**Low-Cost, Covered BNC Cable Termination**


Terminate 1 to 2 dual output sensors for safer, quicker and more accurate data collection. The NEMA 4X aluminum enclosure resists the environmental hazards.

- Hinge cover to protect BNC's from environment
- Terminal strip located behind BNC panel for easy wiring with grounding
- Includes measurement location card

**Specifications**

Inputs	Terminal Block 4 Inputs per channel (A, B, C, GND)
Output	2 BNC Jacks Per Channel Electrically Isolated
Rating	NEMA 4X (IP66)
Door Closure	Snap Latch
Material	Aluminum
Temperature Rating	-58° to 180° F (-50° to 82° C)
Resistance	Resistant to Hose Directed Fluid and Corrosion

**Ordering Information**

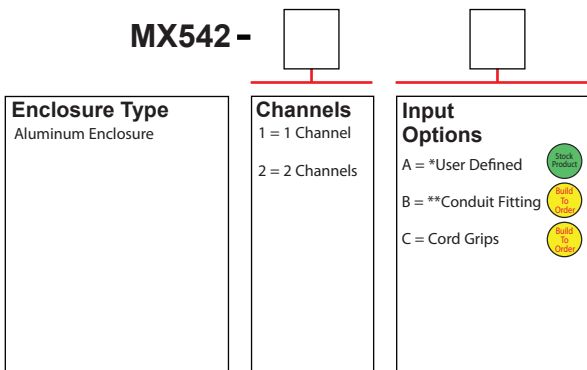

**Example Part Number: MX542-1B**

Dual output BNC mini-MAXX box, vibration/temperature, for single dual output sensor, conduit fitting entry

\* No punch outs are provided in the enclosure for cable entry. User may install any fitting required.

\*\* For use with conduit.

