


Intrinsically Safe Barriers for 4-20 mA Output Sensors

Compatible with CTC Hazardous Location, I.S. and IECEx LP Sensors



Stock Product

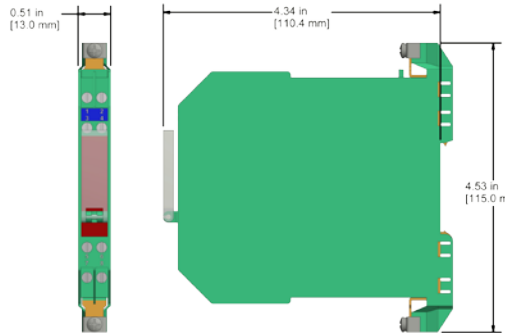

Ambient Temperature Rating: -4°F to +140°F (-20°C to +60°C)


IS141-1B

4-20 mA Output
Intrinsically Safe Barrier

- Zener Diode Barrier
- 2-Channel
- DIN Rail Mounting
- DC Version, Positive Polarity
- Working Voltage 26.5 V at 10 μ a
- Series Resistance Max. 327 Ω
- Fuse Rating 50 mA



Stock Product

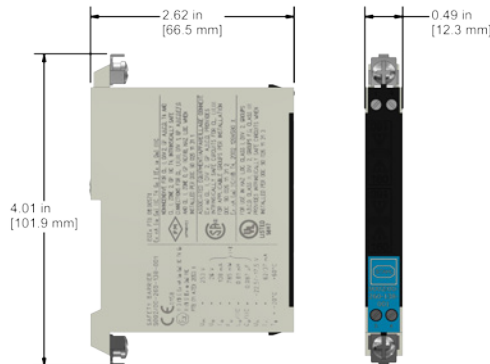

Ambient Temperature Rating: -4°F to +140°F (-20°C to +60°C)

IS151-1B

4-20 mA Output
Intrinsically Safe Barrier

- Zener Diode Barrier
- 2-Channel
- DIN Rail Mounting
- DC Version, Positive Polarity
- Working Voltage 26.5 V at 10 μ a
- Series Resistance Max. 327 Ω
- Fuse Rating 50 mA



PROTECTION & RELIABILITY INSTRUMENTS

Lifetime Warranty on Materials & Workmanship