

Low Voltage Accelerometer, Side Exit Connector/Cable, 25 mV/g

Product Features

**Ultra Low Power Sensor
For Battery Powered
Transmission Systems**




Actual Product Size Shown



- 3 Pin MIL Connector
- Supply Voltage 4-6 Volts
- 2.5 V Bias Voltage Compatible with CSI 9420 and other Wireless Transmission System


AC324-1A 3 Pin Connector

Connector Pin	Polarity
A	(+) Power
B	(-) Common
C	(+) Signal

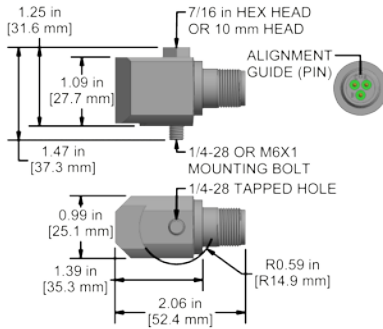


AC324-2C Integral Cable

Conductor	Polarity
Red	(+) Power
Black	(-) Common
White	(+) Signal

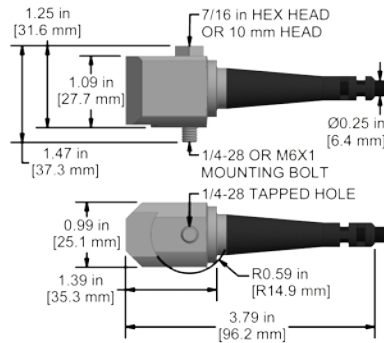

AC324-3C Armored Integral Cable

Conductor	Polarity
Red	(+) Power
Black	(-) Common
White	(+) Signal

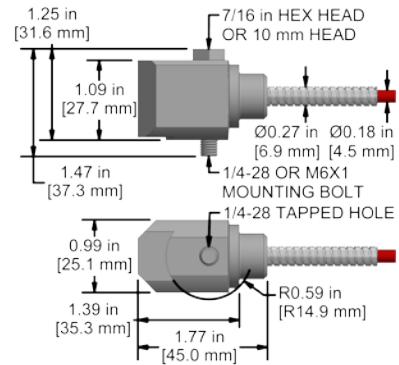

Specifications	Standard	Metric
Part Number	AC324	M/AC324
Vibration		
Sensitivity (±10%)	25 mV/g	
Frequency Response (±3dB)	30-60,000 CPM	0.5-10000 Hz
Frequency Response (±10%)	60-480,000 CPM	1,0-8000 Hz
Dynamic Range	± 50 g, peak	
Electrical		
Settling Time	<1.0 second	
Power Supply Voltage	4-6 VDC (10%)	
Spectral Noise @ 10 Hz	60 µg/√Hz	
Spectral Noise @ 100 Hz	20 µg/√Hz	
Spectral Noise @ 1000 Hz	5 µg/√Hz	
Output Impedance	<100 ohm	
Bias Output Voltage	2.5 V ± 10%	
Case Isolation	>10 ⁹ ohm	
Supply Current	< 20 µA	

Specifications	Standard	Metric
Environmental		
Temperature Range	-58 to 250°F	-50 to 121°C
Maximum Shock Protection	5,000 g, peak	
Sealing	Welded, Hermetic	
Physical		
Sensing Element	PZT Ceramic	
Sensing Structure	Shear Mode	
Weight	5.1 oz	145 grams
Case Material	316L Stainless Steel	
Mounting	1/4-28	
Connector (non-integral)	3 Pin MIL-C-5015	
Resonant Frequency	1,260,000 CPM	21000 Hz
Mounting Torque	2 to 5 ft. lbs.	2.7 to 6.8 Nm
Mounting Hardware	1/4-28 Captive Bolt	M6x1 Captive Bolt
Calibration Certificate	CA10	

Ordering Information

Standard	AC324-1A (1/4-28 Captive Bolt)	AC324-2C / (1/4-28 Captive Bolt)	AC324-3C / (1/4-28 Captive Bolt)
Metric	M/AC324-1A (M6x1 Captive Bolt)	M/AC324-2C / (M6x1 Captive Bolt)	M/AC324-3C / (M6x1 Captive Bolt)

Cable Terminations: L Z

