



Standard Cable




Armored Cable

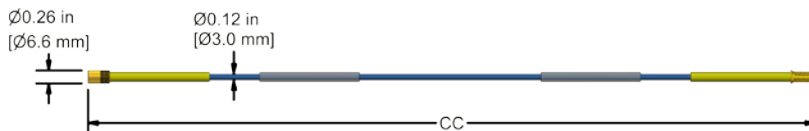

Connector Protector Option

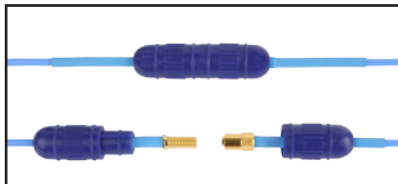

Protective Adhesive Gel

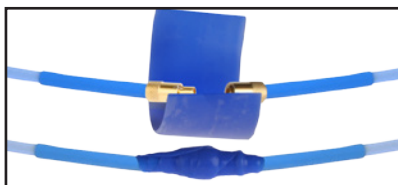

Product Features

PRO DC100854 extension cables combine with PRO DP100851 series probes and PRO DD1008 series drivers to form a complete assembly for monitoring vibration and shaft position.

- Matched with PRO 25 mm probes and driver assemblies for cost effective and reliable measurements
- Excellent chemical resistance
- Protective sleeves to cover connections (optional)

Specifications

Temperature Range: -49°F (-45°C) to 350°F (177°C)
 Connector pull strength up to 70 lbs.
 Matched to 5 & 9 meter system lengths
 Male & Female miniature 12-32 threaded connectors
 FEP jacketed cable, available with optional 304 stainless steel armor jacket

Ordering Information

DC100854

CCC

00

System Length
(REFERENCE ONLY)

	Total Length of Extension Cable	Armor	Regulatory Approval
50 = 5.0 meter	040 = 4.0 meter	00 = No 01 = Yes	00 = CE Certified
90 = 9.0 meter	080 = 8.0 meter	02 = No, with connector protector 03 = Yes, with connector protector	



Example Part Number: **DC100854-040-00-00**
 4.0 meter total length, no armor, CE certified