



Standard Cable




Armored Cable

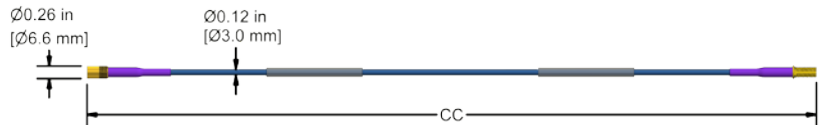

Connector Protector Option

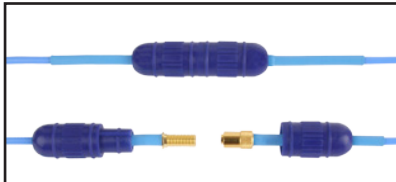

Protective Adhesive Gel

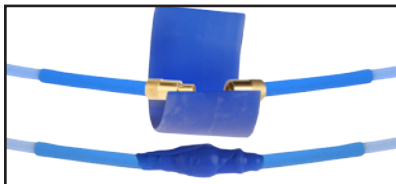

### Product Features

Bently™ Compatible DX330730 extension cables combine with DX3307 series probes and DX3307 drivers to form a complete assembly to monitor vibration and shaft position.

- Matched with Bently™ Compatible 11 mm probes and driver assemblies for cost effective and reliable measurements
- Excellent chemical resistance
- Protective sleeves to cover connections (optional)

### Specifications

Temperature Range: -49°F (-45°C) to 350°F (177°C)  
 Connector pull strength up to 70 lbs  
 Matched to 5 & 9 meter system lengths  
 Male & female miniature 12-32 threaded connectors  
 FEP jacketed cable, available with optional 304 stainless steel armor jacket

### Ordering Information

DX330730



System Length  
(REFERENCE ONLY)

50 = 5.0 meter

90 = 9.0 meter

Total Length of Extension Cable	Armor	Regulatory Approval
040 = 4.0 meter	00 = No 01 = Yes	00 = CE Certified
080 = 8.0 meter	02 = No, with connector protector 03 = Yes, with connector protector	



Example Part Number: **DX330730-040-00-00**  
 4.0 meter total cable length, no armor, CE certified

