

# MEB210 Series

Lightweight, Molded Accelerometer, 100 mV/g Top Exit, Integral Cable, 10-32 Mounting, General Purpose




PROTECTION & RELIABILITY INSTRUMENTS




## Product Features

- ▶ Nylon Overmolded Accelerometer
- ▶ IP68 Rated
- ▶ Low Cost

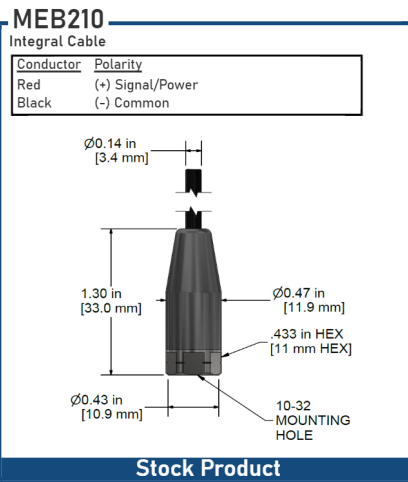

Specifications	Standard	Metric	Specifications	Standard	Metric
Part Number	MEB210	MEB220	<b>Environmental</b>		
Sensitivity (±10%)		100 mV/g	Temperature Range	-58 to 250°F	-50 to 121°C
Frequency Response (±3dB)	30-900,000 CPM	0.5 Hz-15 kHz	Maximum Shock Protection		10,000 g, peak
Frequency Response (±10%)	60-600,000 CPM	1 Hz-10 kHz	Electromagnetic Sensitivity		CE Approved
Dynamic Range		± 50g, peak	Sealing		IP68 Integrally Molded Cable
<b>Electrical</b>			<b>Physical</b>		
Settling Time		< 2 Seconds	Sensing Element		PZT Ceramic
Voltage Source (IEPE)		18-30 VDC	Sensing Structure		Shear Mode
Constant Current Excitation		2-10 mA	Weight	0.35 oz	10 grams
Spectral Noise @ 10 Hz		30 µg/√Hz	Mounting Base		316L Stainless Steel
Spectral Noise @ 100 Hz		4 µg/√Hz	Mounting		10-32 UNF
Spectral Noise @ 1000 Hz		2 µg/√Hz	Cable Jacket Diameter		0.14 in (3.6 mm)
Output Impedance		< 100 ohm	Cable Jacket Material		Polyurethane
Bias Output Voltage		10-14 VDC	Cable Conductor		26 AWG
Case Isolation		>10 <sup>8</sup> ohm			Twisted Shielded Pair
			Resonant Frequency	2,640,000 CPM	44 kHz
			Mounting Hardware	10-32 Stud	M5 Stud
			Calibration Certificate		CA10

## Typical Frequency Response

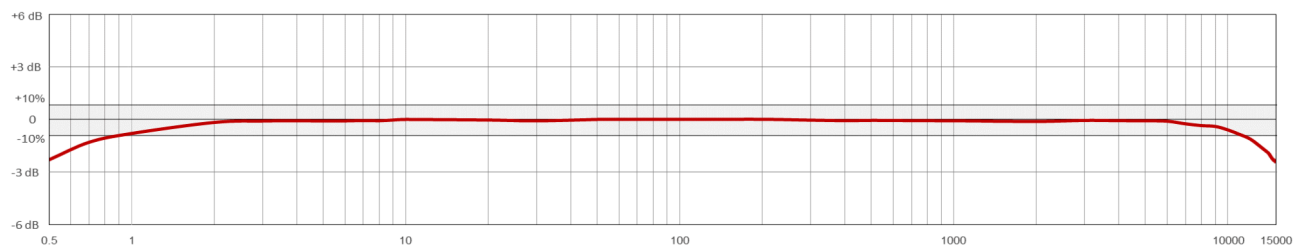

**Lifetime Warranty on Materials & Workmanship**  
[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900