

# TXFA333-TA Series



VIBRATION ANALYSIS HARDWARE

Low Cost, Dual Output Triaxial Sensor, Temperature and Acceleration, Side Exit 6 Pin Connector, 500 mV/g, 10 mV/°C, ±15%



## Product Features


Three Axes of Vibration with Additional Temperature Output in One Sensor

Phase Conforms to Cartesian Coordinate System (Right-Hand Rule)

- ▶ Designed for Low-Speed Rotors, Main Bearings, and Gear Box Inputs
- ▶ Temperature Output 10 mV/°C
- ▶ Compatible with A5A Connector and CB123, CB129 and CB629 Cabling

### TXFA333-TA


Connector Pin	Polarity
1 (Axis Y)	(+) Signal/Power
2 (Axis X)	(+) Signal/Power
3 (Axis Z)	(+) Signal/Power
4	(-) Common/Ground
5	(+) Temperature
6	Not Used



Stock Product

### TXFA433-TA


Connector Pin	Polarity
1 Red (Axis Y)	(+) Signal/Power
2 Green (Axis X)	(+) Signal/Power
3 White (Axis Z)	(+) Signal/Power
4 Black	(-) Common/Grid
5 Blue	(+) Temperature
6	Not Used



Built To Order

### TXFA533-TA


Connector Pin	Polarity
1 Red (Axis Y)	(+) Signal/Power
2 Green (Axis X)	(+) Signal/Power
3 White (Axis Z)	(+) Signal/Power
4 Black	(-) Common/Grid
5 Blue	(+) Temperature
6	Not Used



Built To Order

Specifications	Standard	Metric	Specifications	Standard	Metric
Part Number	TXFA333-TA	M/TXFA333-TA	<b>Environmental</b>		
Sensitivity (±15%)	500 mV/g		Operating Temperature Range	-58 to 250 °F	-50 to 121 °C
Frequency Response (±3dB)	6-420,000 CPM	0,1-7,000 Hz	Electromagnetic Sensitivity	CE	
Frequency Response (±10%)	18-180,000 CPM	0,3-3000 Hz	Sealing	Welded, Hermetic	
Frequency Response (±5%)	18-180,000 CPM	0,3-3000 Hz	Submersible Depth	200 ft.	60 m
Dynamic Range	± 10 g, peak *Vsource ≥ 22V, 12Vbias		SIL Rating	SIL 2	
Temperature Measurement Range	-40 to 250 °F	-40 to 121 °C	<b>Physical</b>		
Temperature Output	10 mV/°C		Sensing Element	PZT Ceramic	
Temperature Sensor	750 mV = 25 °C (±1)		Sensing Structure	Shear Mode	
<b>Electrical</b>			Weight	13.4 oz	380 grams
Settling Time	<2 Seconds		Case Material	316L Stainless Steel	
Voltage Source (IEPE)	18-30 VDC		Connector (Non-Integral)	6 Pin	
Spectral Noise @ 10 Hz	1.7 µg/√Hz		Resonant Frequency	600,000 CPM	10 kHz
Spectral Noise @ 100 Hz	0.2 µg/√Hz		Mounting Torque	2 to 5 ft. lbs.	2,7 to 6,8 Nm
Spectral Noise @ 1000 Hz	0.12 µg/√Hz		Mounting Hardware Supplied	1/4-28 Captive Bolt	M6x1 Captive Bolt
Output Impedance	<100 ohm		Calibration Certificate	CA10	
Bias Output Voltage	10-14 VDC				
Case Isolation	>10 <sup>8</sup> ohm				

## Typical Frequency Response

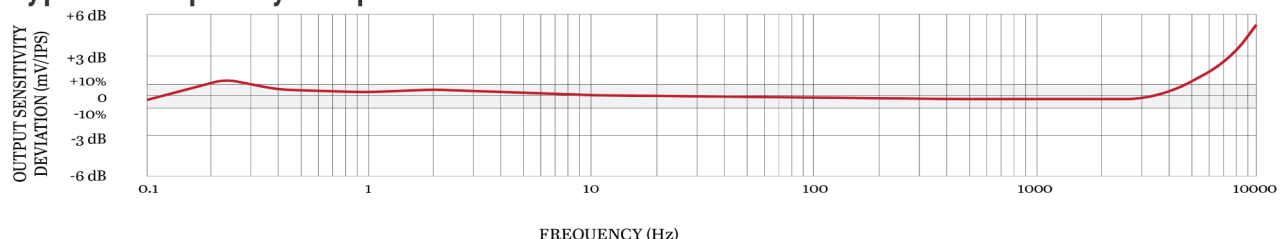

Backed by our Unconditional Lifetime Warranty & Free Annual Recalibration Service

[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900

[www.delta3n.hu](http://www.delta3n.hu)