

J2AG Series




VIBRATION ANALYSIS HARDWARE

2 Socket Mini-MIL Connector with Grounded Backshell,
Polycarbonate Molded, Permanent Measurements, 250 °F (121 °C)
Max Temp

Product Features

Grounded Backshell is Ideal for use with Intrinsicly Safe Applications

- ▶ 2 Socket Mini-MIL Connection for use with CTC Miniature Size Accelerometers
- ▶ Designed to Withstand a Wide Variety of Industrial Applications
- ▶ 316L Stainless Steel Locking Ring for Added Durability and Corrosion Resistance

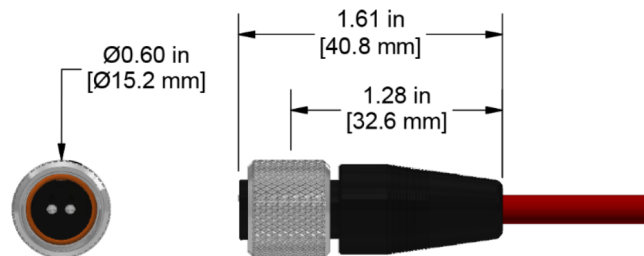

Specifications

Application	Permanent Mount
Max Temperature	250 °F (121 °C)
Connector Type	2 Socket Mini-MIL
Shell Material	Polycarbonate
Connector Insert Material	Polycarbonate
Rating	IP68
Pin-Out	A = Signal (+) B = Common (-)

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900

www.delta3n.hu