

M2AG Series




VIBRATION ANALYSIS HARDWARE

5 Socket M12, Polycarbonate Molded Connector, with 2 Live Sockets and Grounded Backshell, Permanent Mount, 250 °F (121 °C) Max Temp

Product Features

Grounded Backshell is Ideal for use with Intrinsically Safe Applications

- ▶ 5 Socket M12 Connection with 2 Live Sockets, for use with CTC Single Axis, M12 Connector Exit Sensors
- ▶ Designed to Withstand a Wide Variety of Industrial Applications
- ▶ 316L Stainless Steel Locking Ring for Added Durability and Corrosion Resistance

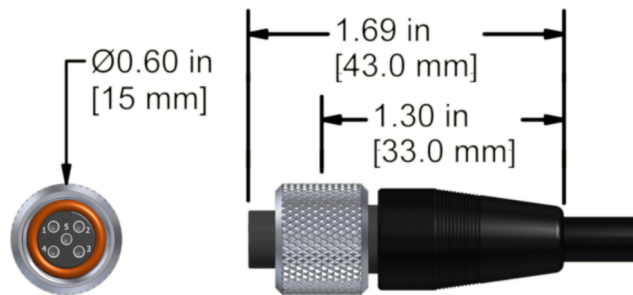

Specifications

Application	Permanent Mount
Max Temperature	250 °F (121 °C)
Connector Type	5 Socket M12 Connector
Shell Material	Polycarbonate Molded
Connector Insert Material	Polycarbonate
Rating	IP68
Pin-Out	1 = Signal (+) 2 = Common (-)

Built to Order

Backed by our Unconditional Lifetime Warranty
www.ctconline.com | sales@ctconline.com | 585-924-5900

www.delta3n.hu