

# M2NG Series




VIBRATION ANALYSIS HARDWARE

5 Socket M12, Nylon Molded Connector, with 2 Live Sockets and Grounded Backshell, Permanent Mount, 250 °F (121 °C) Max Temp

## Product Features

Grounded Backshell is Ideal for use with Intrinsically Safe Applications

- ▶ 5 Socket M12 Connection with 2 Live Sockets, for use with CTC Single Axis, M12 Connector Exit Sensors
- ▶ Designed to Withstand a Wide Variety of Industrial Applications
- ▶ 316L Stainless Steel Locking Ring for Added Durability and Corrosion Resistance

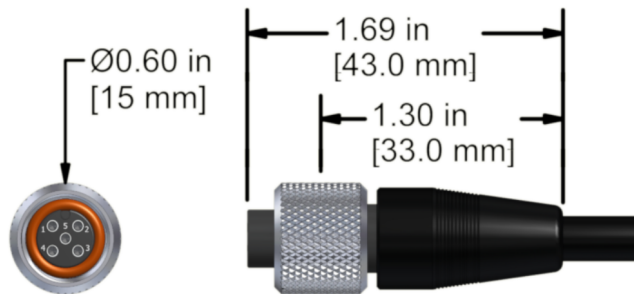

## Specifications

Application	Permanent Mount
Max Temperature	250 °F (121 °C)
Connector Type	5 Socket M12 Connector
Shell Material	Nylon Molded
Connector Insert Material	Nylon
Rating	IP68
Pin-Out	1 = Signal (+) 2 = Common (-)

Built to Order

Backed by our Unconditional Lifetime Warranty

[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900

[www.delta3n.hu](http://www.delta3n.hu)