

E4DA Series

4 Channel BNC Jack Connector for use with CTC Dual Output
Vibration and Temperature Triaxial Sensors, Polyurethane Molded,
250 °F (121 °C) Max Temp




Product Features

4 BNC Jacks to 1 Multi-Conductor Cable

Polyurethane Molded

- ▶ Labelled CHAN 1 (Red), CHAN 2 (Green), CHAN 3 (White), TEMP (Blue)
- ▶ 250 °F (121 °C) Max Temp
- ▶ IP66 Rated

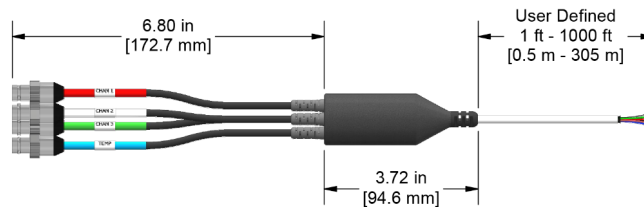

Specifications

Application	Permanent Measurements
Max Temperature	250 °F (121 °C)
Connector Type	BNC Jack
Strain Relief	Polyurethane
Shell Material	Brass Shell
Connector Insert Material	Beryllium Copper
Rating	IP66
Pin-Out	Pin = Signal (+) Case = Common (-)

Built to Order

Backed by our Unconditional Lifetime Warranty
www.ctconline.com | sales@ctconline.com | 585-924-5900

www.delta3n.hu