

F2XA Series



VIBRATION ANALYSIS HARDWARE

2 Channel BNC Plug Connectors for Temperature & Acceleration Sensors, Compatible with Armor Jacketed Cables, Polycarbonate Backshell with Polyurethane Over-Molded Strain Relief, 250 °F (121 °C) Max Temp




Product Features

2 BNC Plugs to 1 Multi-Conductor Cable

Compatible with Armor Jacketed Cables

- ▶ BNC Plugs Labelled Blue (Temperature) and Yellow (Vibration)
- ▶ 250° F (121° C)

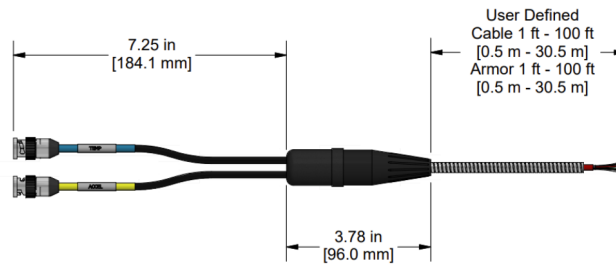

Specifications

Application	Permanent Monitoring
Max Temperature	250° F (121° C)
Connector Type	BNC Plug
Strain Relief	Polyurethane
Shell Material	Brass Shell
Connector Insert Material	Beryllium copper
Rating	IP66
Pin-Out	Pin = Signal (+) Case = Common (-)

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900

www.delta3n.hu