


Fiberglass (3-12 Channels) or Stainless Steel (3-9 Channels) MAXX Boxes and 3 Position

MMX1000

Fiberglass Enclosure



Quick Connect Breakout

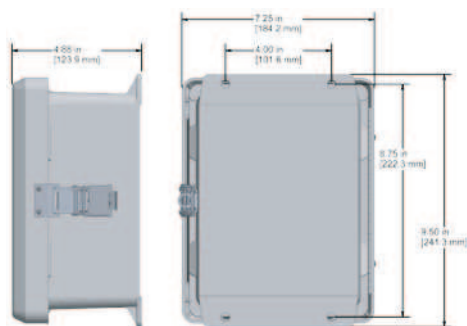


MMX2000

Stainless Steel Enclosure



Quick Connect Breakout

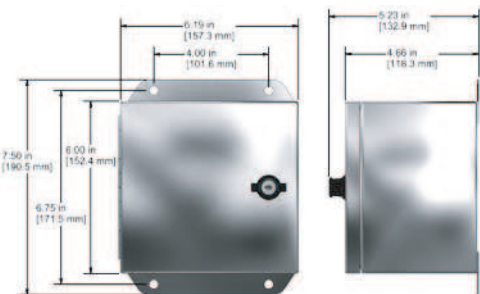

Product Features

Take multiple measurements from one location

Our Modular Maxx Box provides a safe, centralized data collection point. New modules can be easily installed or removed with the Quick-Release DIN rail clip.

- Connects up to 12 (MMX1000) or 9 (MMX2000) remotely installed sensors to portable data collectors, providing a safe data collection point
- Buy the modules that you need now, add more in the future
- Detachable plugs for easy cable installation
- Switch provided to tie common (-) signals for dual or triaxial sensors

Specifications

	MMX1000	MMX2000
Inputs	Terminal Block 3 Inputs per channel (+, -, Shield)	
Output	BNC Jack Per Channel Electrically Isolated	
Rating	NEMA 4X (IP66)	
Door Closure	Snap Latch	Twist Lock
Material	Fiberglass	Stainless Steel
Temperature Rating	-58° to 180° F (-50° to 82° C)	
Resistance	Resistant to Hose Directed Fluid and Corrosion	

Ordering Information

MMX -

Enclosure Type

1000 = Fiberglass Enclosure

1001 = Fiberglass Continuous Output Enclosure

2000 = Stainless Steel Enclosure

2001 = Stainless Steel Continuous Output Enclosure

Note: For continuous output option, a conduit fitting is provided

Channels

3 = 3 Channels

6 = 6 Channels

9 = 9 Channels

12 = 12 Channels

Note: 12 Channel for MMX1000 only

Input Options

A = *User Defined

B = **Conduit Fitting

C = Cord Grips

S = †Stainless Steel Cord Grips



Example Part Number: **MMX1000-3A**

Fiberglass Modular MAXX Box with one (3 channels) din rail mounted BNC module

* No punch outs are provided in the enclosure for cable entry. User may install any fitting required.

** For use with rigid body conduit.

† Stainless Steel enclosure only.

