


PRO Extension Cable




Standard Cable Shown




Armored Cable Shown

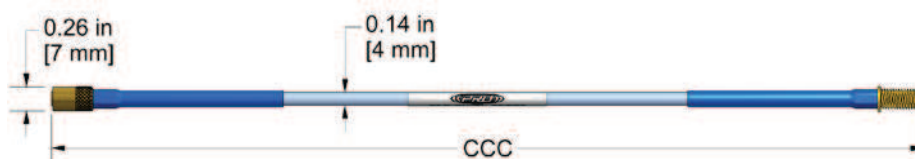

Connector Protector Option

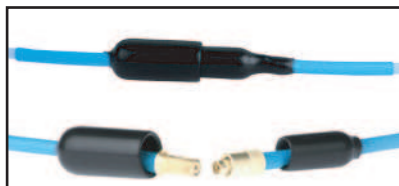

Protective Adhesive Gel Option

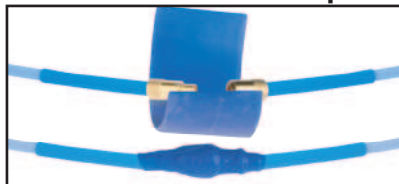

Product Features

PRO DC1001 extension cables match with DP1000 series probes and DP10080 series drivers to form a complete assembly to monitor vibration and shaft position.

- Matched with PRO probes and driver assemblies for cost effective and reliable measurements
- Excellent chemical resistance
- Protective sleeves to cover connections (optional)

Specifications

Temperature Range : -31° F (- 35° C) to 350° F (177° C)
Connector pull strength up to 70 lbs.
Matched to 5 & 9 meter system lengths
Male & Female miniature 12-32 threaded connectors
Teflon [®] jacketed cable

Ordering Information

DC100130 - CCC - [] - [0][0]

System Length (reference only)	Total Length of Extension Cable	Armor	Regulatory Approval
50 = 5.0 m	040 = 4.0 m	00 = No	00 = None
90 = 9.0 m	045 = 4.5 m	01 = Yes	
	080 = 8.0 m	02 = No, with connector protector	
	085 = 8.5 m	03 = Yes, with connector protector	

Example Part Number: DC100130-040-00-00
4.0 meter total length, no armor