


BENTLY™ 3300/3300XL COMPATIBLE Extension Cable




Standard Cable Shown




Armored Cable Shown

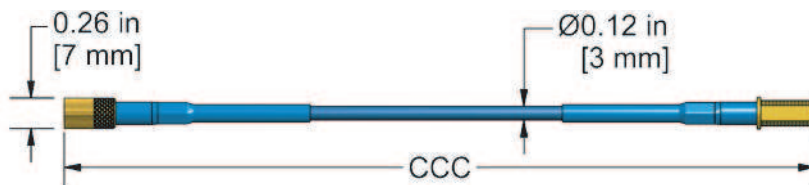

Connector Protector Option

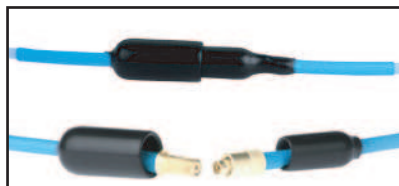

Protective Adhesive Gel Option

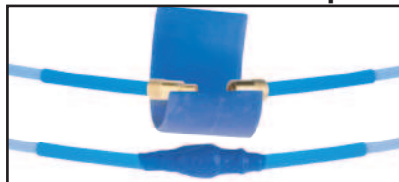

Product Features

Bently™ Compatible DX330130 extension cables combine with DX3301 series probes and DX330180 drivers to form a complete assembly to monitor vibration and shaft position.

- Matched with Bently™ Compatible probes and driver assemblies for cost effective and reliable measurements
- Excellent chemical resistance
- Protective sleeves to cover connections (optional)

Specifications

Temperature Range: -31°F (-35°C) to 350°F (177°C)
Connector pull strength up to 70 lbs.
Matched to 5 & 9 meter system lengths
Male & Female miniature 12-32 threaded connectors
Teflon [®] jacketed cable

Ordering Information



System Length (REFERENCE ONLY)	Total Length of Extension Cable	Armor	Regulatory Approval
50 = 5.0 meter	040 = 4.0 meter	00 = No	00 = None
	045 = 4.5 meter	01 = Yes	
90 = 9.0 meter	080 = 8.0 meter	02 = No, with connector protector	
	085 = 8.5 meter	03 = Yes, with connector protector	



Example Part Number: DX330130-040-00-00
4.0 meter total cable length, no armor, no approvals



Section 6 - PROBING LINE