

Proximity Probe Driver Enclosures, 1-6 Channel

**PXE150P-06-AA** (as shown)  
Fiberglass Enclosure




**Product Features**

**Accommodates up to 6 Proximity Probe Drivers**  
Enclosure protects components from dirt, dust, oil and water.

- Accepts inputs from proximity probes
- For use with DD100180, DD100980, DX330180 & DX330980 Series Proximity Probe Drivers
- Optional DC Power Supply, switchable 110/220 VAC to 100/240 VAC to 24VDC power supply
- Probes, Cable, and Drivers Sold and Specified Separately

**Specifications**

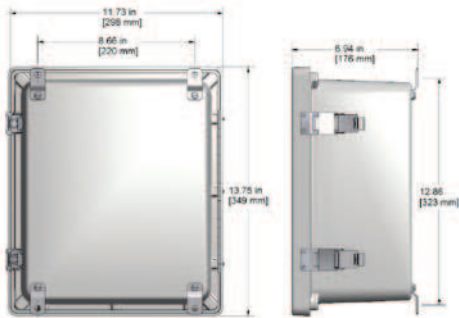

1-6 Driver Enclosure Drawing

Sensors Inputs	Proximity Probe: 1 Input
Output	BNC Jack for Dynamic Signal and Terminal Blocks
Power	100-240 VAC
Rating	NEMA 4X (IP66)
Door Closure	Snap Latches
Material	Fiberglass
Operating temperature range	15° to 140°F (-10° to 60°C)
Resistance	Resistant to Hose Directed Fluid and Corrosion

**Ordering Information**



Temperature	# of Channels	Enclosure Entry	Enclosure Exit
P = Power Supply Blank = No Power Supply	01 = 1 channel 02 = 2 channels 03 = 3 channels 04 = 4 channels 05 = 5 channels 06 = 6 channels	A = None B = 1" Conduit Fitting & 1/2" conduit fitting for power C = Cord Grips & 1/2" conduit fitting for power	A = None B = Conduit Fitting

All Products Are Built To Order

Note: 1/2" Conduit Fitting for Power Supply (PXE150P Series)

**Example Part Number: PXE150P-06-AA**  
Power supply, 6 channels, no enclosure entry, no enclosure exit



Lifetime Warranty on Materials & Workmanship