


**Triaxial mini-MAXX Boxes
1 and 2 Triaxial Input**

MX504-2A Powder Coated Aluminum Enclosure



4 Pin Output for Interface with J4 Series Connectors

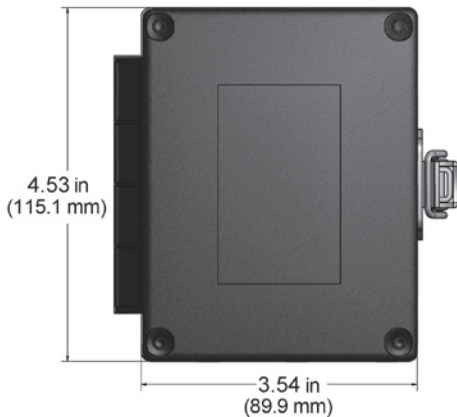

Product Features

Designed for Triaxial Data Collection

Protects 4 Pin output connectors and data from harmful effects of exposure from the environment. Perfect for cooling towers and other wet or dusty environments.


- Hinge cover to protect 4 Pin connectors from environment
- Connects remotely installed sensors using J4 Series Connectors
- Includes measurement location card

Specifications

Inputs	Conduit or Cord Grips Terminal Blocks
Output	4 Pin J4 Series Connector
Rating	NEMA 4X (IP66)
Door Closure	Snap Latch
Material	Aluminum
Temperature Rating	-58° to 180° F (-50° to 82° C)
Resistance	Resistant to Hose Directed Fluid and Corrosion

Ordering Information

MX504 -

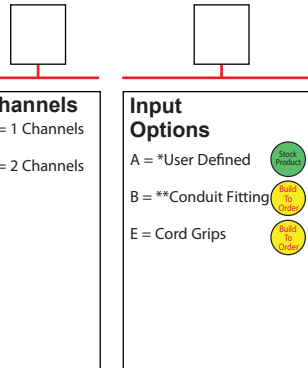

Example Part Number: MX504-2A

Triaxial mini-MAXX enclosure, two triax inputs, user defined cable entry

* No punch outs are provided in the enclosure for cable entry. User may install any fitting required.

** For use with conduit.