

SSB6000

Stainless Steel Single Output Switch Box with Sloped Top; 4, 6, 8, 10 or 12 Channel Inputs


SSB6000 Sloped Top Stainless Steel Enclosure



Bottom View of Module with Durable Steel DIN Rail Clip



Easy-To-Remove Base Plate

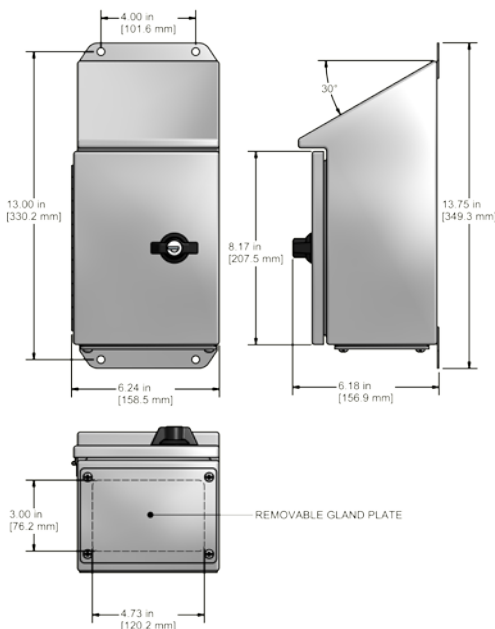

Product Features

Enclosures With DIN Rail Mountable Modules for Multiple Inputs and a Switched Output

Featuring a sloped top that prevents dust and dirt build-up. Ideal for the mining as well as the paper industries and debris-filled areas.





- Provides a switched output from remotely installed sensors to a data collector through a BNC and a 2 Pin MIL spec connector
- Removable bottom base plate allows for easy installation of user defined cable inputs
- Quick-release input terminal blocks

Specifications

SSB6000	
Inputs	Terminal Block 3 Inputs per channel (+, -, Shield)
Switched Output	BNC Jack and 2 Pin MIL
Continuous Output	Multi-pin connector for interface with online systems (optional) Requires JB907-3A
Conduit Fittings (For Rigid Body Conduit)	3/4" = 4 Channels 1" = 6 & 8 Channels 1 1/4" = 10 & 12 Channels
Cord Grip	0.118 – 0.256 inches (3,0 – 6,5 mm)
Rating	NEMA 4X (IP66)
Door Closure	Twist Lock
Material	Stainless Steel
Temperature Rating	-58° to 180° F (-50° to 82° C)
Resistance	Resistant to Hose Directed Fluid and Corrosion

Ordering Information

SSB -

Enclosure Type 6000 = Stainless Steel Enclosure with Sloped Top	Channels 4 = 4 Channels 6 = 6 Channels 8 = 8 Channels 10 = 10 Channels 12 = 12 Channels	Input Options A = *User Defined  B = **Conduit Fitting  C = Cord Grips  S = †Stainless Steel Cord Grips 
---	---	---

Example Part Number: **SSB6000-12C**

Stainless steel single output switch box with sloped top, 12 sensor capacity, cord grip entry

* No punch outs are provided in the enclosure for cable entry. User may install any fitting required.

** For use with rigid body conduit.

† Stainless Steel enclosure only.

Optional Accessories:

- T-Plug output connector for online systems interface. Note: End user is responsible for providing enclosure exit when using this option.

Backed by our Unconditional Lifetime Warranty

www.ctconline.com

