


DX330854 Series

BENTLY™ 3300/3300XL Compatible 25 mm Extension Cable


Standard Cable




Armored Cable

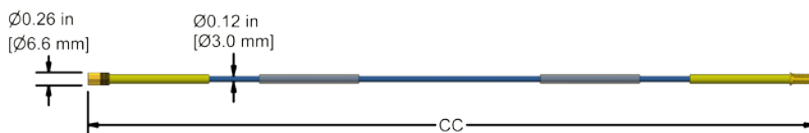

Connector Protector Option

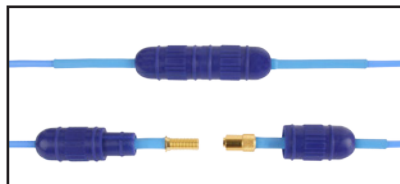

Protective Adhesive Gel

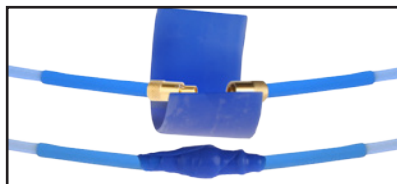

Product Features

Bently™ Compatible DX330854 extension cables combine with DX330851 series probes and DX3308 drivers to form a complete assembly for monitoring vibration and shaft position.

- Matched with Bently™ Compatible 25 mm probes and driver assemblies for cost effective and reliable measurements
- Excellent chemical resistance
- Protective sleeves to cover connections (optional)

Specifications

Temperature Range: -49°F (-45°C) to 350°F (177°C)
 Connector pull strength up to 70 lbs
 Matched to 5 & 9 meter system lengths
 Male & female miniature 12-32 threaded connectors
 FEP jacketed cable, available with optional 304 stainless steel armor jacket

Ordering Information

DX330854

CCC

00

System Length
(REFERENCE ONLY)

	Total Length of Extension Cable	Armor	Regulatory Approval
50 = 5.0 meter	040 = 4.0 meter	00 = No 01 = Yes	00 = CE Certified
90 = 9.0 meter	080 = 8.0 meter	02 = No, with connector protector 03 = Yes, with connector protector	

All Products Are Built To Order

Example Part Number: **DX330854-040-00-00**
 4.0 meter total cable length, no armor, CE certified

SECTION 6 - PRO LINE
Bently™ Compatible Proximity Probes

Lifetime Warranty on Materials & Workmanship

www.ctconline.com

