




**Panel Mount Option
(Shown Above)**

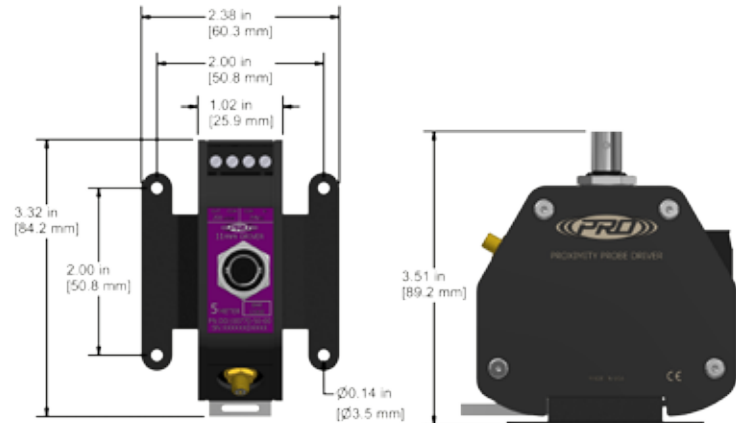

Certified

**Panel Mount Option
(Shown Above)**

Product Features

Driver assembly DX330780 offers multiple options for mounting and easy connections via BNC jack and screw terminals.

- Flexible system configuration
- DC gap and shaft vibration signals available via BNC jack and terminal block for analysis or monitoring
- Multiple mounting options (DIN rail, panel or none)

TERMINAL BLOCK WIRING

Connections	Functions
V _t	-24 VDC
Com	+24 VDC
Com	+24 VDC
V _{out}	-100 mV/mil, DC Gap

Specifications

Temperature Range: -31°F (-35°C) to 185°F (85°C)
Linear Range: 20 to 180 mils (0.5 - 4.5 mm) @ approximately -1 to -17 VDC
Nominal Voltage Output: -100 mV/mil (-3.94 V/mm)
Input Power/Voltage: -17.5 VDC to -30 VDC
Aluminum enclosure
Miniature 12-32 threaded connector
4 position screw terminals + BNC output
Calibrated to AISI 4140 steel

Ordering Information

DX330780 - - -

System Length	Mounting Type	Regulatory Approval
5 = 5.0 meter 9 = 9.0 meter	0 = Panel (Mounting Screws Are Not Included) 1 = DIN 2 = None	00 = CE Certified



Example Part Number: DX330780-91-00
4140 Steel, 9 meter system length, DIN mount, CE certified

