




Panel Mount Option
(Shown Above)

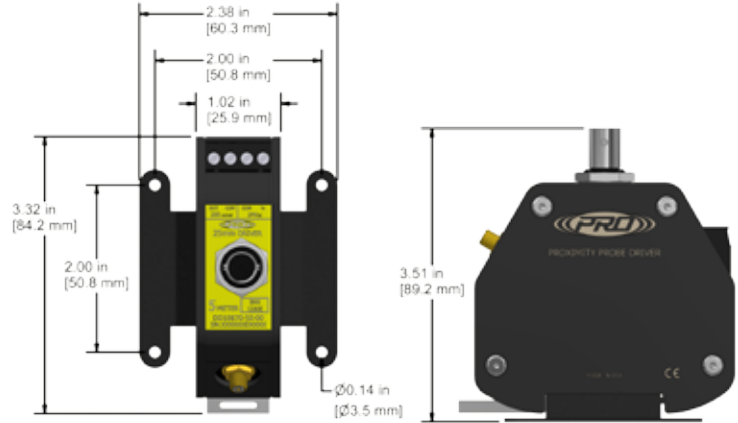

Certified

Panel Mount Option
(Shown Above)

Product Features

Driver assembly DX330880 offers multiple options for mounting and easy connections via BNC jack and screw terminals.

- Flexible system configuration
- DC gap and shaft vibration signals available via BNC jack and terminal block for analysis or monitoring
- Multiple mounting options (DIN rail, panel or none)

TERMINAL BLOCK WIRING

Connections	Functions
V _t	-24 VDC
Com	+24 VDC
Com	+24 VDC
V _{out}	-20 mV/mil, DC Gap

Specifications

Temperature Range: -31°F (-35°C) to 185°F (85°C)
Linear Range: 25 to 525 mils (.63 - 13.33 mm) @ approximately -1.5 to -11.5 VDC
Nominal Voltage Output: -20 mV/mil (-0.787 V/mm)
Input Power/Voltage: -17.5 VDC to -30 VDC
Aluminum enclosure
Miniature 12-32 threaded connector
4 position screw terminals + BNC output
Calibrated to AISI 4140 steel

Ordering Information

DX330880 - - - 00

System Length	Mounting Type	Regulatory Approval
5 = 5.0 meter 9 = 9.0 meter	0 = Panel (Mounting Screws Are Not Included) 1 = DIN 2 = None	00 = CE Certified



Example Part Number: **DX330880-91-00**
4140 Steel, 9 meter system length, DIN mount, CE certified