

# Factory Installed Cable Connectors

## A2A

2 Socket, MIL-Style

Polycarbonate Molded

Application	Pin Out	Max. Temp.	Compatible Cables
Permanent Mount	A = Signal (+) B = Common (-)	250° F (121° C)	CB102, CB103, CB110, CB111, CB202, CB206, CB802, CB806, CB810, CB811



IP66



## A3A

3 Socket, MIL-Style

Polycarbonate Molded

Application	Pin Out	Max. Temp.	Compatible Cables
Permanent Mount	A = Signal (+) B = Common (-) C = Signal (+)	250° F (121° C)	CB105, CB112, CB212, CB218, CB612, CB812, CB818



IP66



## A2E

2 Socket, Right Angle Mil-Style

Polycarbonate Molded

Application	Pin Out	Max. Temp.	Compatible Cables
Permanent Mount	A = Signal (+) B = Common (-)	250° F (121° C)	CB102, CB103, CB110, CB111, CB202, CB206, CB802, CB806



IP66



## A3E

3 Socket, Right Angle Mil-Style

Polycarbonate Molded

Application	Pin Out	Max. Temp.	Compatible Cables
Permanent Mount	A = Signal (+) B = Common (-) C = Signal (+)	250° F (121° C)	CB105, CB112, CB212, CB218, CB612



IP66



## A2L

2 Socket, MIL-Style

Polycarbonate Molded With Hydraulic Hose Armor

Application	Pin Out	Max. Temp.	Compatible Cables
Permanent Mount	A = Signal (+) B = Common (-)	212° F (100° C)	CB502, CB511



IP66




## A3L

3 Socket, MIL-Style

Polycarbonate Molded With Hydraulic Hose Armor

Application	Pin Out	Max. Temp.	Compatible Cables
Permanent Mount	A = Signal (+) B = Common (-) C = Signal (+)	212° F (100° C)	CB512

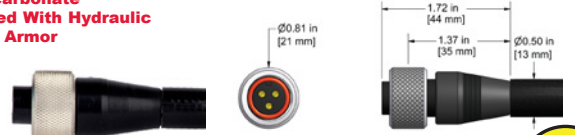

IP66



## A2N

2 Socket, MIL-Style

Nylon Molded

Application	Pin Out	Max. Temp.	Compatible Cables
Permanent Mount	A = Signal (+) B = Common (-)	250° F (121° C)	CB102, CB103, CB110, CB111, CB202, CB206, CB802, CB806, CB810, CB811



IP66



## A3N

3 Socket, MIL-Style

Nylon Molded

Application	Pin Out	Max. Temp.	Compatible Cables
Permanent Mount	A = Signal (+) B = Common (-) C = Signal (+)	250° F (121° C)	CB105, CB112, CB212, CB218, CB812, CB818



IP66



## A2P

2 Socket, MIL-Style

Polyurethane Molded

Application	Pin Out	Max. Temp.	Compatible Cables
Permanent Mount	A = Signal (+) B = Common (-)	250° F (121° C)	CB102, CB103, CB110, CB111, CB202, CB206, CB802, CB806, CB810, CB811



IP66




## A3P

3 Socket, MIL-Style

Polyurethane Molded

Application	Pin Out	Max. Temp.	Compatible Cables
Permanent Mount	A = Signal (+) B = Common (-) C = Signal (+)	250° F (121° C)	CB105, CB112, CB212, CB812, CB818

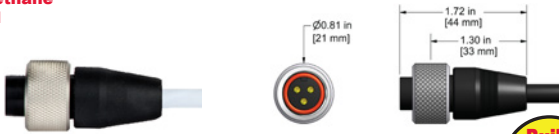

IP66

