


Factory Installed Cable Connectors

D2D

2 Socket,
Right
Angle MIL

Polyurethane Molded

Application	Pin Out	Max. Temp.	Compatible Cables
Portable Measurements	A = Signal (+) B = Common (-)	250° F (121° C)	CB103, CB104, CB108, CB110



IP66




D3D

3 Socket,
Right Angle MIL

Polyurethane Molded

Application	Pin Out	Max. Temp.	Compatible Cables
Portable Measurements	A = Signal (+) B = Common (-) C = Signal (+)	250° F (121° C)	CB105, CB117

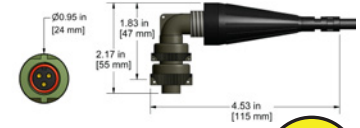

IP66



D2J

2 Socket,
MIL with
Backshell



Application	Pin Out	Max. Temp.	Compatible Cables
Portable Measurements, Permanent Mount	A = Signal (+) B = Common (-)	350° F (177° C)	CB102, CB111, CB202, CB206, CB802, CB806, CB811



IP66




D3DG*

3 Socket,
Right Angle MIL

Polyurethane Molded

Application	Pin Out	Max. Temp.	Compatible Cables
Portable Measurements	A = Signal (+) B = Common (-) C = Signal (+)	250° F (121° C)	CB105, CB117

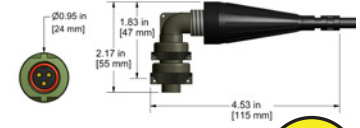

IP66

*Grounded To Sensor Case



D2H

2 Socket,
MIL with
Backshell

Application	Pin Out	Max. Temp.	Compatible Cables
Portable Measurements, Permanent Mount	A = Signal (+) B = Common (-)	250° F (121° C)	CB102, CB103, CB104, CB108, CB110, CB111, CB202, CB206, CB802, CB806, CB810, CB811



IP66



D3H

3 Socket,
MIL with
Backshell

Application	Pin Out	Max. Temp.	Compatible Cables
Portable Measurements, Permanent Mount	A = Signal (+) B = Common (-) C = Signal (+)	250° F (121° C)	CB105, CB112, CB212, CB218, CB812, CB818



IP66



D2M

2 Socket,
MIL with
Backshell

With Hydraulic Hose Armor

Application	Pin Out	Max. Temp.	Compatible Cables
Permanent Mount	A = Signal (+) B = Common (-)	212° F (100° C)	CB502, CB511



IP66



D3M

3 Socket,
MIL with
Backshell

With Hydraulic Hose Armor

Application	Pin Out	Max. Temp.	Compatible Cables
Permanent Mount	A = Signal (+) B = Common (-) C = Signal (+)	212° F (100° C)	CB512



IP66



D2Q

2 Socket,
MIL with
Grounded Backshell

Application	Pin Out	Max. Temp.	Compatible Cables
Permanent Mount	A = Signal (+) B = Common (-)	250° F (121° C)	CB190, CB206



IP66


For Class I, Division 2



D3Q

3 Socket,
MIL with
Grounded Backshell

Application	Pin Out	Max. Temp.	Compatible Cables
Permanent Mount	A = Signal (+) B = Common (-) C = Signal (+)	250° F (121° C)	CB191, CB212

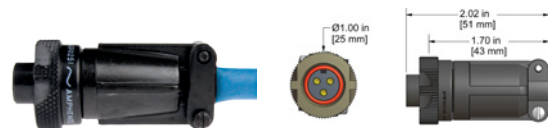

IP66

For Class I, Division 2

