


# Factory Installed Cable Connectors

## F

### BNC Plug

Application	Pin Out	Max. Temp.	Compatible Cables
Portable Measurements, Permanent Mount	Pin = Signal (+) Case = Common (-)	250° F (121° C)	CB102, CB103, CB104, CB108, CB110, CB111

**Polycarbonate Molded**

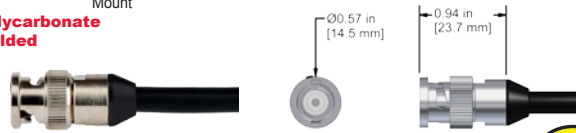


**Build To Order**

## FBLK

### BNC Plug

Application	Pin Out	Max. Temp.	Compatible Cables
Portable Measurements, Permanent Mount	Pin = Signal (+) Case = Common (-)	250° F (121° C)	CB102, CB103, CB104, CB108, CB110, CB111

**Polycarbonate Molded**




**Build To Order**

## FRED

### BNC Plug

Application	Pin Out	Max. Temp.	Compatible Cables
Portable Measurements, Permanent Mount	Pin = Signal (+) Case = Common (-)	250° F (121° C)	CB102, CB103, CB104, CB108, CB110, CB111

**Polycarbonate Molded**

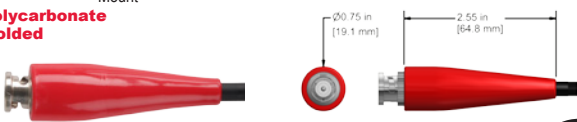


**Build To Order**

## FX

### BNC Plug

**Epoxied**

Application	Pin Out	Max. Temp.	Compatible Cables
Portable Measurements, Permanent Mount	Pin = Signal (+) Case = Common (-)	250° F (121° C)	CB102, CB103, CB104, CB108, CB110, CB111, CB202, CB206

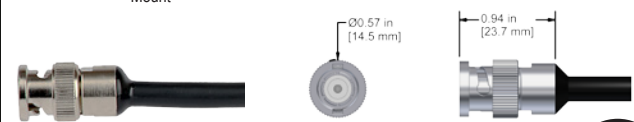


**Build To Order**

## F2C

### 2 BNC Plugs to 1 Multi-Conductor Cable

**Polycarbonate Molded**

Application	Pin Out	Max. Temp.	Compatible Cables
Portable Measurements	Pin = Signal (+) Case = Common (-)	250° F (121° C)	CB105, CB117, CB112

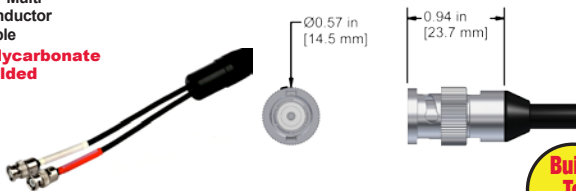

**Build To Order**


\* Complete Technical Drawing Available on Page 147

## F3C

### 3 BNC Plugs to 1 Multi-Conductor Cable

**Polycarbonate Molded**

Application	Pin Out	Max. Temp.	Compatible Cables
Portable Measurements	Pin = Signal (+) Case = Common (-)	250° F (121° C)	CB105, CB117, CB119

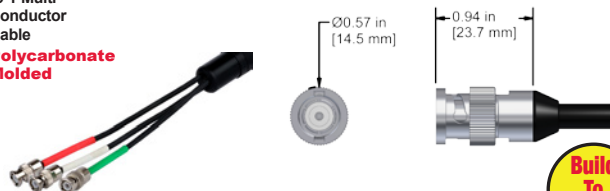

**Build To Order**

\* Complete Technical Drawing Available on Page 147

## F4C

### 4 BNC Plugs to 1 Multi-Conductor Cable

**Polycarbonate Molded**

Application	Pin Out	Max. Temp.	Compatible Cables
Portable Measurements	Pin = Signal (+) Case = Common (-)	250° F (121° C)	CB105, CB117, CB119



**Build To Order**

\* Complete Technical Drawing Available on Page 147

## FX90

### Right Angle BNC Plug

**Epoxied**

Application	Pin Out	Max. Temp.	Compatible Cables
Portable Measurements, Permanent Mount	Pin = Signal (+) Case = Common (-)	250° F (121° C)	CB102, CB103, CB104, CB108, CB110, CB111, CB202, CB206



**Build To Order**

\* Complete Technical Drawing Available on Page 147

## FX92

### 2 Right Angle BNC Plugs to 1 Multi-Conductor Cable

**Epoxied**

Application	Pin Out	Max. Temp.	Compatible Cables
Portable Measurements, Permanent Mount	Pin = Signal (+) Case = Common (-)	250° F (121° C)	CB105, CB112, CB117, CB212,



**Build To Order**

\* Complete Technical Drawing Available on Page 147

## FX93

### 3 Right Angle BNC Plugs to 1 Multi-Conductor Cable

**Epoxied**

Application	Pin Out	Max. Temp.	Compatible Cables
Portable Measurements, Permanent Mount	Pin = Signal (+) Case = Common (-)	250° F (121° C)	CB105, CB117, CB119, CB218,



**Build To Order**

\* Complete Technical Drawing Available on Page 147