

MX742



VIBRATION ANALYSIS HARDWARE

Dual Input & Output Mini-MAXX Box, Polycarbonate Enclosure, NEMA 4X (IP66) Rated, Sensor Input Options: 1 or 2 Dual Output Sensors




Product Features

Provides a low-cost solution that is ideal for harsh environments, including coastal areas exposed to salt air

Internally earth grounded for noise reduction

- ▶ 316 stainless steel latch and mounting feet resist corrosion in harsh environments
- ▶ Terminal strip located behind BNC panel for easy wiring with grounding

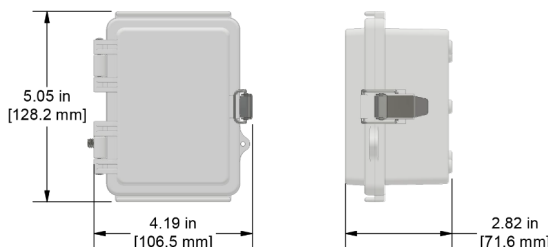

Specifications

Temperature Range	-58 °F (-50 °C) to 180 °F (82 °C)
Enclosure Material	Polycarbonate
Inputs	Terminal Block 4 Inputs per Channel (A, B, C, GND)
Outputs	2 BNC Jacks per Channel, Electrically Isolated
Sensor Input Options	1, 2 Channel Options
Rating	NEMA 4X (IP66)
Door Closure	Flip Latch
Dimensions	5.05 x 4.19 x 2.82 in. (128.2 x 106.5 x 71.6 mm)
Cord Grips	Optional
Resistance	Resistant to Hose-Directed Fluid and Corrosion

Ordering Information

MX742 -



Enclosure Type	Sensor Inputs (Dual Output)	Input Options
Polycarbonate Enclosure	1 = 1 Sensors 2 = 2 Sensors	A = User Defined* B = Conduit Fitting** C = Nylon Cord Grips

*No punch outs are provided in the enclosure for cable entry. User may install any fitting required
**For use with conduit

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900

www.delta3n.hu