

AC307 Series



VIBRATION ANALYSIS HARDWARE

Premium High Temperature IEPE Accelerometer, 325 °F (162 °C)
Maximum Temperature, Top Exit 2 Pin Connector, 100 mV/g, ±5%



Product Features


High Temperature Resistance (325 °F) Sensor
Proven Sensor for Standard High-Temperature Applications

- ▶ Great for Extended Use at High Temperatures
- ▶ Improved RF Immunity

AC307-1A

2 Pin Connector

Connector Pin	Polarity
A	(+) Signal/Power
B	(-) Common




Stock Product

AC307-5A

CB206 Armored Integral Cable

Conductor	Polarity
Red	(+) Signal/Power
Black	(-) Common
Shield	Cable Drain Wire




Built To Order

AC307-6A

CB611 Heavy Duty Armored Integral Cable


Conductor	Polarity
Red	(+) Signal/Power
Black	(-) Common
Shield	Cable Drain Wire



Built To Order

Specifications	Standard	Metric	Specifications	Standard	Metric
Part Number	AC307	M/ or M8/AC307	Environmental		
Sensitivity (+5%)	100 mV/g		Operating Temperature Range	-58 to 325 ° F	-50 to 162 ° C
Frequency Response (±3dB)	30-750,000 CPM	0.5-12500 Hz	Maximum Shock Protection	5,000 g, peak	
Frequency Response (+10%)	120-360,000 CPM	2.0-6000 Hz	Electromagnetic Sensitivity	CE	
Dynamic Range	±80 g, peak *Vsource ≥ 22V, 12Vbias		Sealing	Welded, Hermetic	
Electrical			Physical		
Settling Time	<2.5 Seconds		Sensing Element	PZT Ceramic	
Voltage Source (IEPE)	18-30 VDC		Sensing Structure	Shear Mode	
Constant Current Excitation	2-10 mA		Weight	3 oz.	86 grams
Spectral Noise @ 10 Hz	8 µg/√Hz		Case Material	316L Stainless Steel	
Spectral Noise @ 100 Hz	.82 µg/√Hz		Mounting Thread	1/4-28 Blind Tapped Hole	
Spectral Noise @ 1000 Hz	.3 µg/√Hz		Connector (Non-Integral)	2 Pin -MIL-C-5015	
Output Impedance	<100 ohm		Resonant Frequency	1,380,000 CPM	23000 Hz
Bias Output Voltage	10-14 VDC		Mounting Torque	2 to 5 ft. lbs.	2.7 to 6.8 Nm
Case Isolation	>10 ⁸ ohm		Mounting Hardware Supplied	1/4-28 Stud	M6x1 or M8x1.25 Adapter Stud
Dielectric Breakdown Voltage	SIL 2		Calibration Certificate	CA10	

Typical Frequency Response

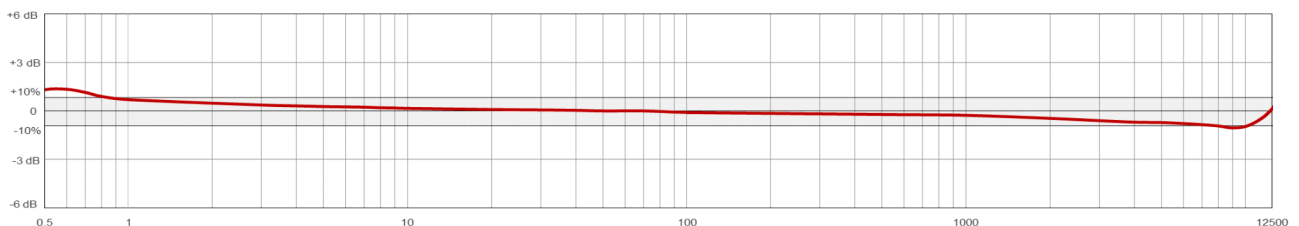

Backed by our Unconditional Lifetime Warranty & Free Annual Recalibration Service

www.ctconline.com | sales@ctconline.com | 585-924-5900

www.delta3n.hu