

# MH154-1B




VIBRATION ANALYSIS HARDWARE

Flat Surface Magnet Mounting Base, 15 lbs. (7 kg) Pull Strength, 0.58 in. (14.73 mm) OD, 0.33 in. (8.38 mm) Height, 10-32 Integral Mounting Stud

## Product Features

- ▶ Durable 17-4 Stainless Steel case and mounting stud
- ▶ High strength Neodymium Iron Boron magnet optimizes pull strength and performance
- ▶ Maximum frequency response up to 10 kHz when paired with MH133-1A mounting target

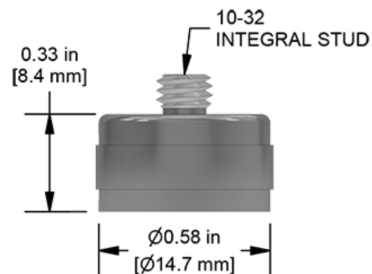

## Specifications

Max Temperature	266 °F (130 °C)
Case Material	17-4 Stainless Steel
Magnet Material	Neodymium Iron Boron
Dimensions	0.58 in. (14.73 mm) OD, 0.33 in. (8.38 mm) Height
Pull Strength	15 lbs. (7 kg)
Sensor Mounting	10-32 Integral Stud

## Chemical Compatibilities for Reference

- ▶ Gasoline - A
- ▶ Methanol - A
- ▶ Lubricants - A

## Compatibility

- ▶ Compatible with all top exit sensors with 10-32 mounting holes

Stock Product

Backed by our Unconditional Lifetime Warranty

[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900

[www.delta3n.hu](http://www.delta3n.hu)