

# V3RB Series




VIBRATION ANALYSIS HARDWARE

High Temperature, 3 Socket MIL-Style Seal-Tight Viton® Boot Connector with PPS Insert, Wired for Interface to Biaxial AC119-1D Sensor Wired as X and Z Entry, Permanent Mount, 350 °F (177 °C) Max Temp

## Product Features

- ▶ 3 Socket MIL-Style Seal-Tight Viton® Boot Connector
- ▶ PPS Insert, 350 °F (177 °C) Max Temp
- ▶ Wired for Interface to Biaxial AC119-1D Sensor Wired as X and Z Entry

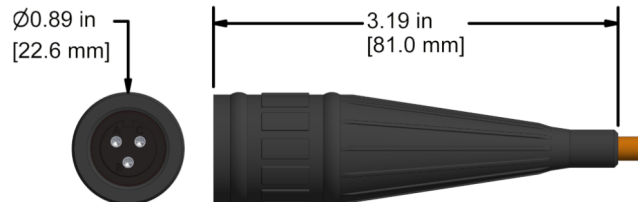

## Specifications

Application	Permanent Mount
Max Temperature	350 °F (177 °C)
Connector Type	3 Socket MIL-Style Viton® Seal-Tight Boot
Boot Material	Viton®
Pin Contact Material	Polyphenylene Sulfide (PPS) Insert
Rating	IP69
Pin-Out	A = Signal (+) CTC Green B = Signal (+) CTC White C = Common (-) CTC Black

Stock Product

Backed by our Unconditional Lifetime Warranty  
[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900

[www.delta3n.hu](http://www.delta3n.hu)