

Q3AB Series




VIBRATION ANALYSIS HARDWARE

3 Socket MIL-Style, Polycarbonate Molded Connector with Grounded Backshell for Class I, Division 2 Locations, Wired for Interface to Biaxial AC949-1D Sensor Wired as X and Z Entry, Permanent Mount, 250 °F (121 °C) Max Temp

Product Features

3 Socket Connector for use with Biaxial AC949 Sensors

Grounded Locking Ring for Class 1, Division 2 Installations

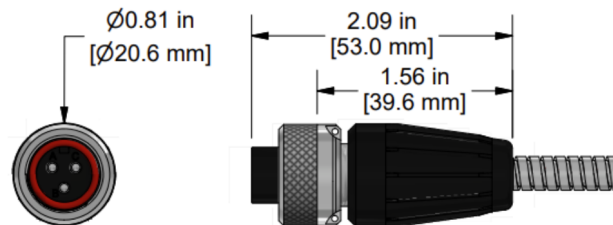

Specifications

| | |
|---------------------------|--|
| Application | Permanent Installation |
| Max Temperature | 250 °F (121 °C) |
| Connector Type | 3 Socket MIL-Style |
| Shell Material | Polycarbonate Molded |
| Connector Insert Material | Polycarbonate |
| Rating | IP68 |
| Pin-Out | A = Signal (+) CTC Green B = Signal (+) CTC White C = Common (-) CTC Black |

Built to Order

Backed by our Unconditional Lifetime Warranty
www.ctconline.com | sales@ctconline.com | 585-924-5900

www.delta3n.hu