

A5A Series




VIBRATION ANALYSIS HARDWARE

6 Socket MIL-Style with 5 Live Sockets, Polycarbonate Molded Connector, Compatible with CTC Dual Output Vibration and Temperature Triaxial Sensors, Permanent Mount, 250 °F (121 °C) Max Temp

Product Features

- ▶ 6 Socket Connection for use with CTC Dual Output Vibration and Temperature Triaxial Sensors
- ▶ Designed for a Wide Variety of Industrial Applications
- ▶ 316L Stainless Steel Locking Ring for Added Durability and Corrosion Resistance

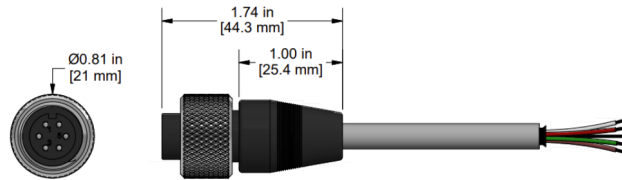

Specifications

Application	Permanent Mount
Max Temperature	250 °F (121 °C)
Connector Type	6 Socket MIL-Style
Shell Material	Polycarbonate Molded
Connector Insert Material	Polycarbonate
Rating	IP68
Pin-Out	Socket 1 = Ch. Y (+), Red Socket 2 = Ch. X (+), Green Socket 3 = Ch. Z (+), White Socket 4 = Common (-), Black Socket 5 = Temperature (+), Blue Socket 6 - N/A

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900

www.delta3n.hu