

E2XA Series



VIBRATION ANALYSIS HARDWARE

2 Channel BNC Jack Connectors for Dual Output Temperature & Vibration Sensors, Compatible with Armor Jacketed Cables, Polycarbonate Backshell with Polyurethane Over-Molded Strain Relief, 250 °F (121 °C) Max Temp




Product Features

2 BNC Jacks to 1 Multi-Conductor Cable

Compatible with Armored Cables

- ▶ BNC Jacks Labelled Blue (Temperature) and Yellow (Vibration)
- ▶ 250 °F Max Temp

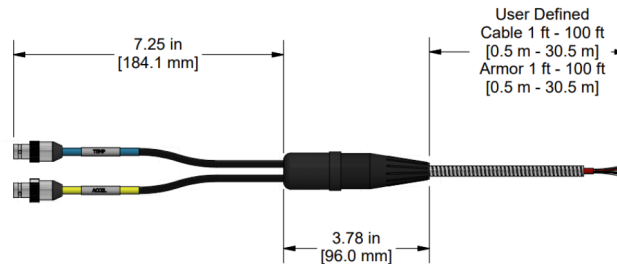

Specifications

Application	Portable & Permanent Measurements
Max Temperature	250 °F (121 °C)
Connector Type	BNC Jack
Strain Relief	Polyurethane
Shell Material	Brass Shell
Connector Insert Material	Beryllium Copper
Rating	IP66
Pin-Out	Pin = Signal (+) Case = Common (-)

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900

www.delta3n.hu