

# E2XB Series



VIBRATION ANALYSIS HARDWARE

2 Channel BNC Jack Connectors for Biaxial Accelerometers,  
Compatible with Armor Jacketed Cables, Polycarbonate Backshell  
with Polyurethane Over-Molded Strain Relief, 250 °F (121 °C) Max  
Temp




## Product Features

2 BNC Jacks to 1 Multi-Conductor Cable

Compatible with Armored Cables

- ▶ BNC Jacks Labelled Green – (X), White – (Z)
- ▶ 250 °F (121 °C) Max Temp

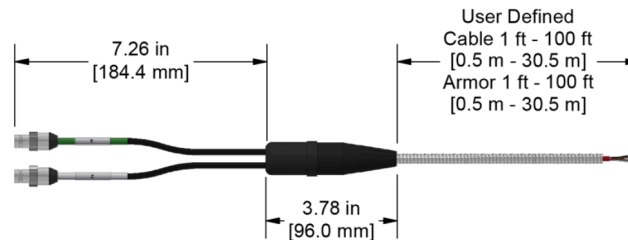

## Specifications

Application	Permanent Monitoring
Max Temperature	250 °F (121 °C)
Connector Type	BNC Jack
Strain Relief	Polyurethane
Shell Material	Brass Shell
Connector Insert Material	Beryllium Copper
Rating	IP66
Pin-Out	Pin = Signal (+) Case = Common (-)

Built to Order

Backed by our Unconditional Lifetime Warranty

[www.ctconline.com](http://www.ctconline.com) | [sales@ctconline.com](mailto:sales@ctconline.com) | 585-924-5900

[www.delta3n.hu](http://www.delta3n.hu)