

F2XB Series



VIBRATION ANALYSIS HARDWARE


2 Channel BNC Plug Connectors for Biaxial Accelerometers,
Compatible with Armor Jacketed Cables, Polycarbonate Backshell
with Polyurethane Over-Molded Strain Relief, 250 °F (121 °C) Max
Temp

Product Features

2 BNC Plugs to 1 Multi-Conductor Cable

Compatible with Armored Cables

▶ BNC Plugs Labelled Green – (X), White – (Z)

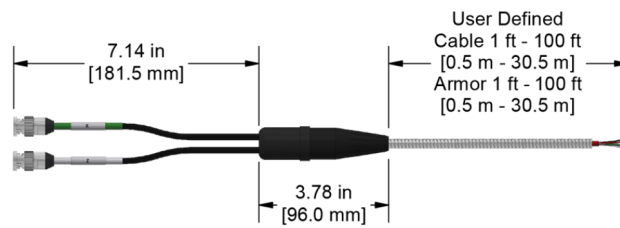

Specifications

Application	Permanent Monitoring
Max Temperature	250 °F (121 °C)
Connector Type	BNC Jack
Strain Relief	Polyurethane
Shell Material	Brass Shell
Connector Insert Material	Beryllium copper
Rating	IP66
Pin-Out	Pin = Signal (+) Case = Common (-)

Built to Order

Backed by our Unconditional Lifetime Warranty

www.ctconline.com | sales@ctconline.com | 585-924-5900

www.delta3n.hu