




**Panel Mount Option
(Shown Above)**

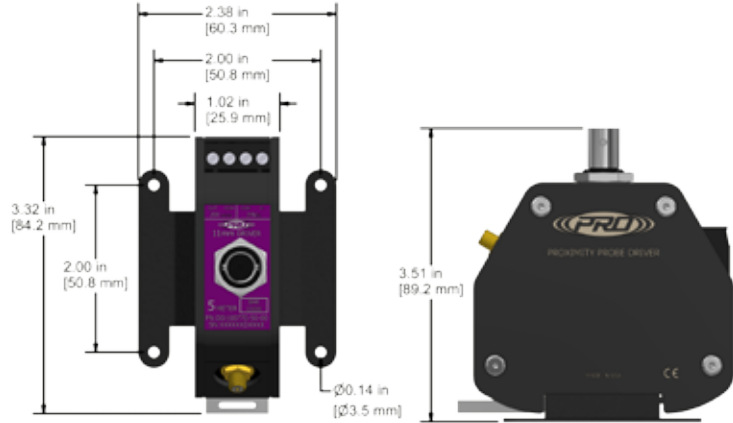

Certified

**Panel Mount Option
(Shown Above)**

Product Features

Driver assembly DX791 offers multiple options for mounting and easy connections via BNC jack and screw terminals.

- Flexible system configuration
- 4-20 mA current loop provides power to the driver, and a displacement output proportional to the axial shaft movement (thrust)
- -100 mV/mil (-3.94 V/mm) output available at terminal block (V_{out} & Com) and at the BNC
- Multiple mounting options (DIN rail, panel or none)

TERMINAL BLOCK WIRING

Connections	Functions
-	4-20 mA Gap
+	4-20 mA Supply
Com	
V_{out}	-100 mV/mil, DC Gap

Specifications

Temperature Range: -31°F (-35°C) to 185°F (85°C)
 Linear Range: 20 to 180 mils (0.5 - 4.5 mm) @ approximately -1 to -17 VDC
 Nominal Voltage Output: -100 mV/mil (-3.94 V/mm)
 4-20 mA Output: defined by full scale selection
 Input Power/Voltage: 17.5 VDC to 30 VDC (Loop Powered)
 Aluminum enclosure
 Miniature 12-32 threaded connector
 4 position screw terminals + BNC output
 Calibrated to AISI 4140 Steel

Ordering Information

DX791 - - - -

Full Scale	System Length	Mounting Type	Regulatory Approval
12 = 1.2-0-1.2 mm 50 = 50-0-50 mils	50 = 5.0 meter 90 = 9.0 meter	00 = Panel (Mounting Screws Are Not Included) 01 = DIN 02 = None	00 = CE Certified



Example Part Number: DX791-50-90-01-00
 4140 Steel, 50-0-50 mils full scale, 9 meter system length, DIN mount, CE certified

