

TXEA333-VT Series



VIBRATION ANALYSIS HARDWARE

Low Cost, Dual Output, Piezo Velocity & Temperature Triaxial Sensor, Side Exit 6 Pin Connector, 100 mV/in/sec, 10 mV/°C, ±15%



Product Features

Three Axes of Vibration with Additional Temperature Output in One Sensor


Phase Conforms to Cartesian Coordinate System (Right-Hand Rule)

- ▶ Must Use with A5A Connector, and CB123, CB126 or CB629 Cabling

TXEA333-VT

Side Exit 6 Pin Connector

Connector Pin	Polarity
1 (Axis Y)	(+) Signal/Power
2 (Axis X)	(+) Signal/Power
3 (Axis Z)	(+) Signal/Power
4	(-) Common/Grid
5	(+) Temperature
6	Not Used




Stock Product

TXEA433-VT

CB123 Integral Cable

Connector Pin	Polarity
1 Red (Axis Y)	(+) Signal/Power
2 Green (Axis X)	(+) Signal/Power
3 White (Axis Z)	(+) Signal/Power
4 Black	(-) Common/Grid
5 Blue	(+) Temperature
6	Not Used




Built To Order

TXEA533-VT

CB629 Armored Integral Cable


Connector Pin	Polarity
1 Red (Axis Y)	(+) Signal/Power
2 Green (Axis X)	(+) Signal/Power
3 White (Axis Z)	(+) Signal/Power
4 Black	(-) Common/Grid
5 Blue	(+) Temperature
6	Not Used



Built To Order

Specifications	Standard	Metric	Specifications	Standard	Metric
Part Number	TXEA333-VT	M/TXEA333-VT	Environmental		
Sensitivity (±15%)	100 mV/in/sec		Operating Temperature Range	-58 to 250 °F	-50 to 121 °C
Frequency Response (±3dB)	60 to 270,000 CPM	1 Hz to 4.5 kHz	Maximum Shock Protection	5,000 g, peak	
Frequency Response (±10%)	120 to 240,000 CPM	2 Hz to 4 kHz	Electromagnetic Sensitivity	CE	
Dynamic Range	± 50 in/sec. pk *Vsource ≥ 22V, 12Vbias		SIL Rating	SIL 2	
Electrical			Physical		
Settling Time	<4 seconds		Sensing Element	PZT Ceramic	
Voltage Source (IEPE)	18-30 VDC		Sensing Structure	Shear Mode	
Constant Current Excitation	2-10 mA		Weight	12.3 oz	349 grams
Spectral Noise @ 10 Hz	25 µIPS/√Hz		Case Material	316L Stainless Steel	
Spectral Noise @ 100 Hz	2 µIPS/√Hz		Connector (Non-Integral)	6 Pin	
Spectral Noise @ 1000 Hz	0.5 µIPS/√Hz		Resonant Frequency	600,000 CPM	10,000 Hz
Output Impedance	<100 ohm		Mounting Torque	2 to 5 ft. lbs.	2,7 to 6,8 Nm
Bias Output Voltage	10-14 VDC		Mounting Hardware Supplied	1/4-28 Captive Bolt	M6x1 Captive Bolt
Case Isolation	>10 ⁹ ohm		Calibration Certificate	CA10	

Typical Frequency Response

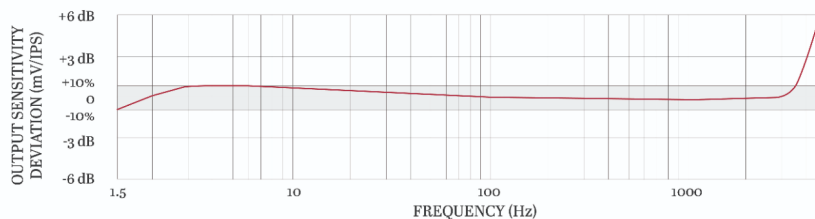

Backed by our Unconditional Lifetime Warranty & Free Annual Recalibration Service

www.ctconline.com | sales@ctconline.com | 585-924-5900

www.delta3n.hu