

DD100170 Series



8 mm PRO Proximity Probe Driver for Eddy Current Probe, 4-20 mA Output




Product Features

PRO Line Proximity Drivers pair with PRO Line Proximity Probes to offer configurable machinery protection with high quality components and industry best lead time.

4-20mA current loop provides power to the driver, and a current output proportional to Dynamic Displacement

- ▶ Isolated voltage output standard at BNC and terminal block Vout and Com
- ▶ Upgraded to include SecureLock connector
- ▶ For use with PRO Proximity Probes Only

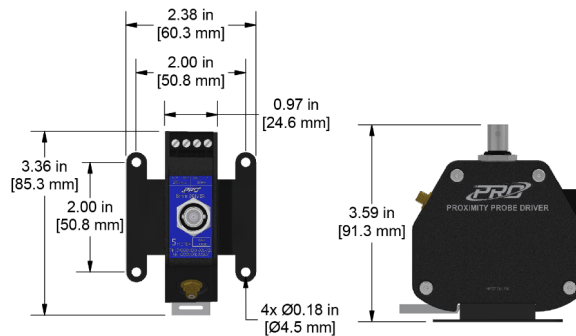

Specifications

Temperature Range	-49 to 185 °F (-45 to 85°C)
Enclosure	Aluminum
Probe Connector	SecureLock
Power & Output Connector	4 Position Terminal Block & BNC
Input Voltage	-17.5 to -30 VDC
Linear Range	10-90 mils (0.25 - 2.30 mm)
Nominal Voltage Output	-200 mV/mil (-7.87 V/mm)
4-20 mA Output Proportional To	Dynamic Displacement

Built to Order

www.delta3n.hu

Lifetime Warranty on Materials & Workmanship

www.ctconline.com | sales@ctconline.com | 585-924-5900